


**SINOTRUK**



**MODEL C7H 64480 TT AMT**  
**6×4 TRACTOR**

**ENGINE**

Model	SINOTRUK MC13.48-30
Type	Euro III Emission Standard 6 Cylinder In-line, Water Cooled
Displacement	12.419L
Fuel consumption	≤186g/kWh
Maximum output	480hp( 353Kw) at 1900 rpm
Maximum torque	2300Nm at 1050~1400 rpm

**TRANSMISSION**

Model	ZF12TX2621 TD, 12 forward and 2 reverse with retarder
Ratio	16.69; 12.92; 9.93; 7.69; 5.90; 4.57; 3.66; 2.83; 2.17; 1.68; 1.29; 1; 15.54®; 12.03®

**CLUTCH**

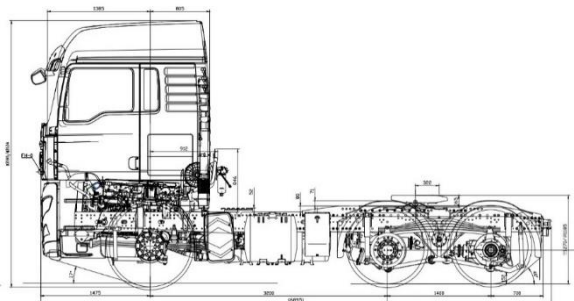
Diameter	430 mm
Type	Single Plate
Operation	Hydraulically-Air Assistance

**PROPELLER SHAFT**

Type	Double Universal Joint Propeller Shaft with Gear-shaped Coupling Flange
------	---

**AXLE**

Front Axle	Sinotruk VPD71, With Automatic Brake Gap Adjustment Arm
Rear Axle	Sinotruk MCY13Q, With Automatic Brake Gap Adjustment Arm
Ratio	3.36 (Option: 3.08; 3.70)

**CHASSIS**

Frame	U-profile Parallel Ladder Frame with Section Of 270x85x8 mm
Suspension	Front 3 Semi-elliptic Leaf Springs Rear Bogie Suspension Of 5 Leaf Semi-elliptic Leaf Springs

**STEERING**

Model	BOSCH8098 Power Steering
Operation	Hydraulically-air Assistance
Ratio	22.2-26.2

**BRAKES**

Service	Dual Circuit Compressed Air Brake
Parking	Spring Energy on Rear Axles
Auxiliary	Exhaust Brake EVB,

**WHEELS & TYRES**

Rims	9.00x22.5, 10 Hole-steel, Aluminum
Tyres	Front 385/65R22.5 Rear 315/80R22.5 Tubeless

**DRIVER'S CAB**

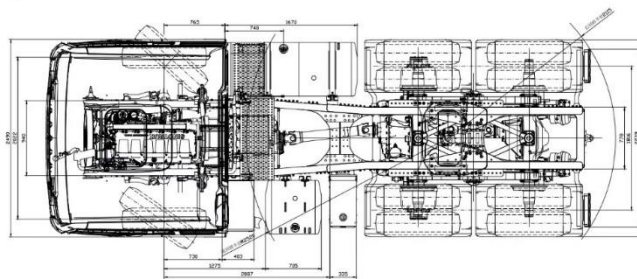
Cab Control	Hydraulically Tiltable To The Front
Seating	Adjustable Air Driver's Seat And Adjustable Rigid Co-driver's Seat, with Heating And Ventilation System
Type	Double Sleepers; 4-point Support Fully Floating Suspension; Stereo Radio/Usb Interface; MP5 Machine

**FUEL TANK**

Capacity	600+250L Capacity with Locking Fuel Cap
Material	Aluminum

**ELECTRICS**

Operating Voltage	24 V, Negative Grounded
Starter	24 V, 5.5 Kw
Alternator	28 V, 2240 W
Batteries	2 X 12 V, 240 Ah

**DIMENSIONS IN MM**

Wheel base	3200+1400
Front wheel track	2022
Rear wheel track	1816
Front overhang	1475
Rear overhang	700
Approach angle (°)	17
Departure angle (°)	40
Overall length	6775
Overall width	2490
Overall height	3595
Height of fifth wheel above road	1270

**MASS IN KG**

Vehicle Tare Mass	9220
Front Axle Tare Mass	4980
First Rear Axle Tare Mass	2165
Second Rear Axle Tare Mass	2075
Manufacturer's Gross Vehicle Mass	25000
Manufacturer's Gross Combination Mass	80000
Manufacturer's Gross Front Axle Mass	7700
Manufacturer's Gross Rear Axle Mass	26000
Permissible Gross Vehicle Mass	25700
Permissible Gross Combination Mass	56000
Permissible Front Axle Mass	7700
Permissible Rear Axle Mass	18000

**MASS IN KG**

Maximum Driving Speed (km/h)	110
Maximum Gradeability (%)	35
Minimum Turning Circle (m)	18
Ground Clearance (mm)	152

**SITRAK****MODEL G7 64480 TT AMT**

*All Rights Reserved! The manufacturer reserves the right of technical  
alternation/change for better improvement without prior notice!*